

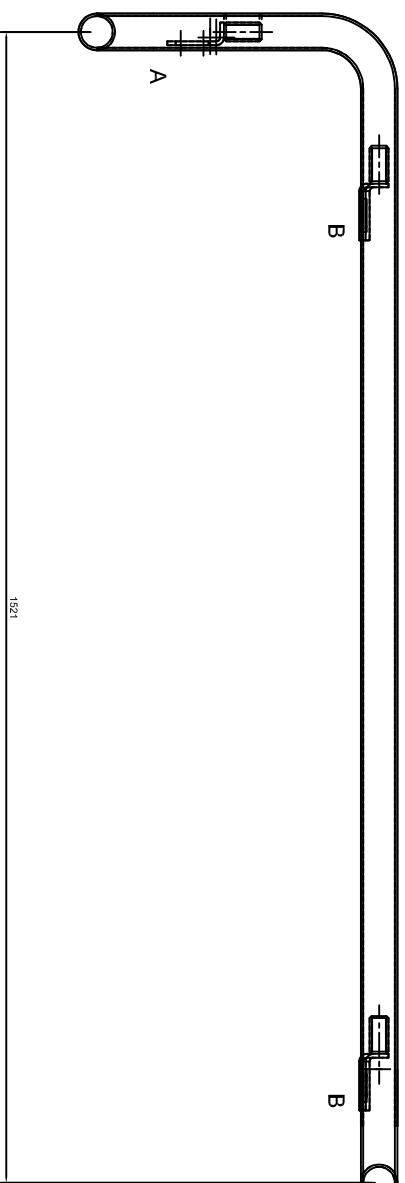
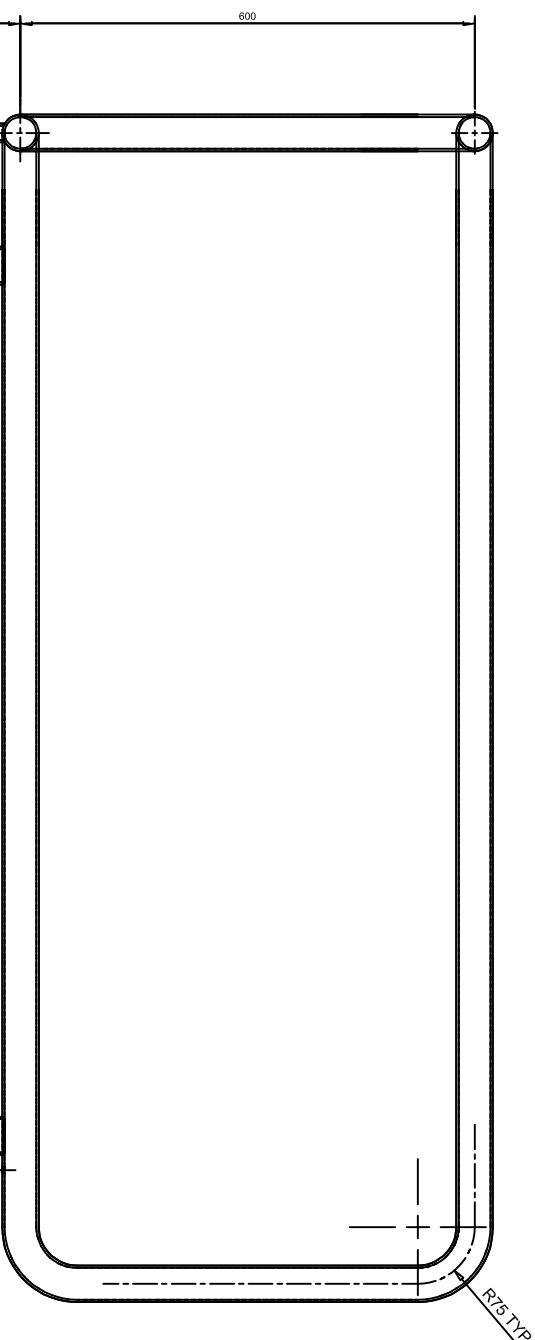





- NOTES:
1. MATERIAL TO BE:
STANCHIONS 50x25x3 THICK RECTANGULAR HOLLOW SECTION GRADE 43CTO BS EN 10025: 1990S.235JRH.
HANDRAIL 50.8 O.D. x 2 THICK CIRCULAR HOLLOW SECTION GRADE 43C TO BS 4360 (REPLACED BY BS EN 10296 AND 10305).
 2. FINISH TO BE HOT DIP GALVANISED TO BS EN ISO 1461. (TO BE GALVANISED BY A MEMBER OF GALVANIZERS ASSOCIATION).
 3. ALL WELDS TO BE 5 FULL FILLET WELD.

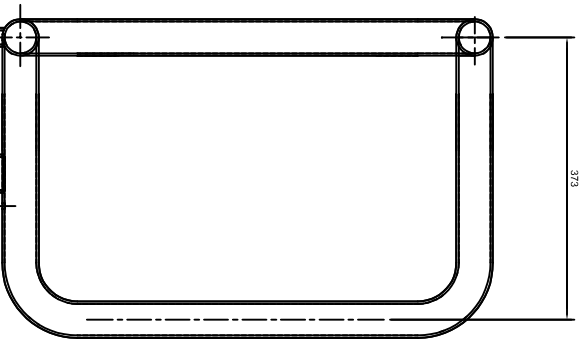


ISOMETRIC VIEW
SCALE 1:10

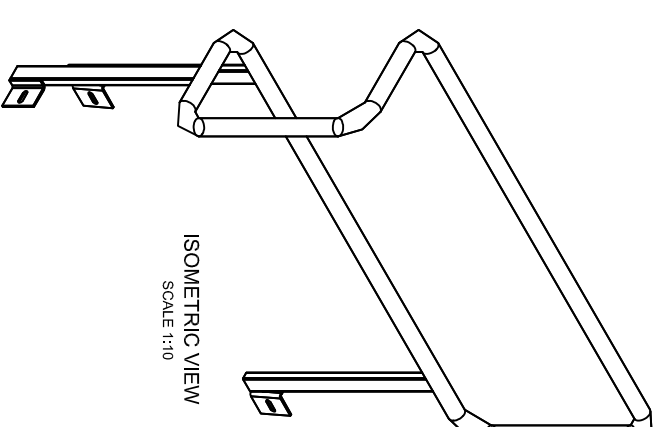

DETAIL OF STANCHION FOOT TYPE A
SCALE 1:12

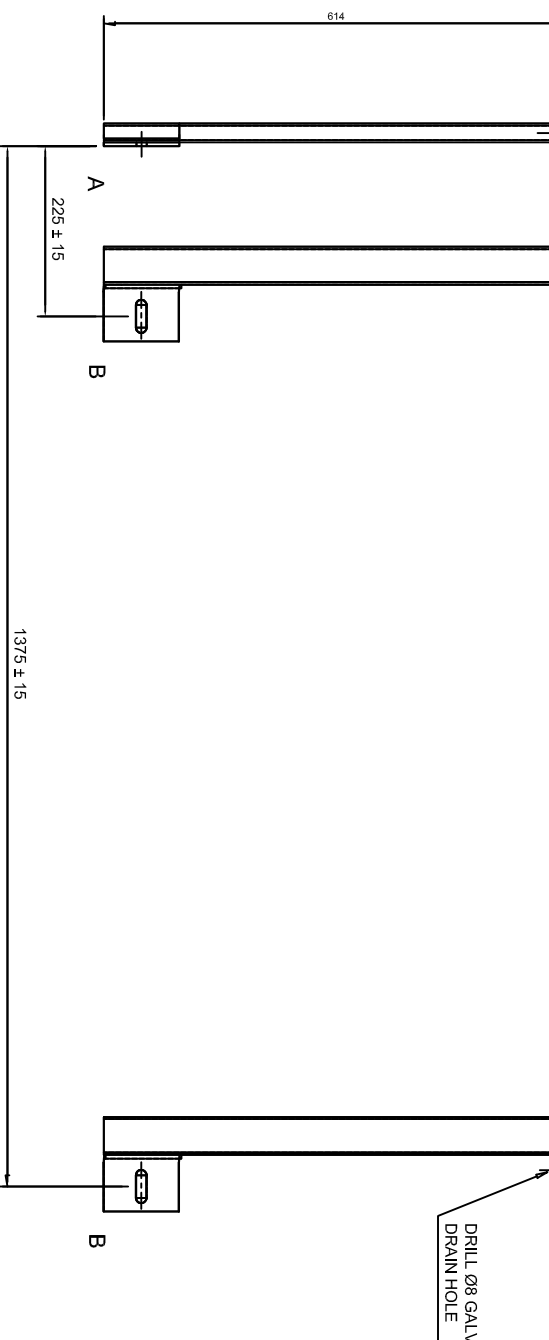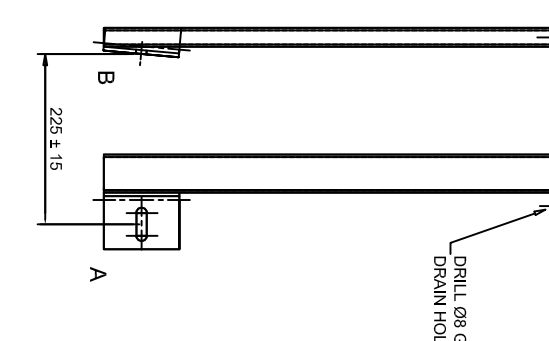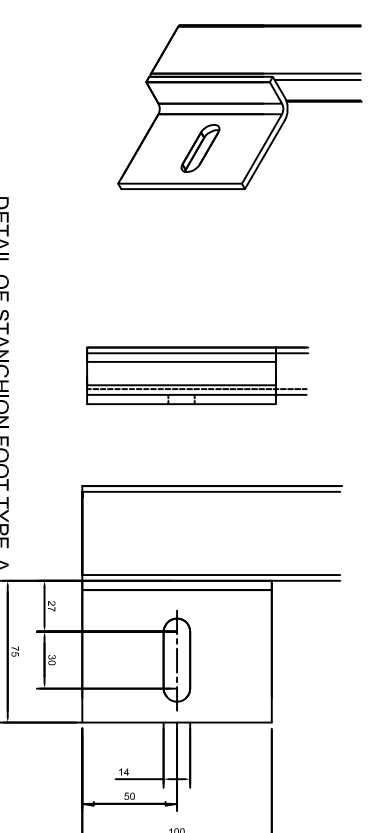

DETAIL OF STANCHION FOOT TYPE B
SCALE 1:12

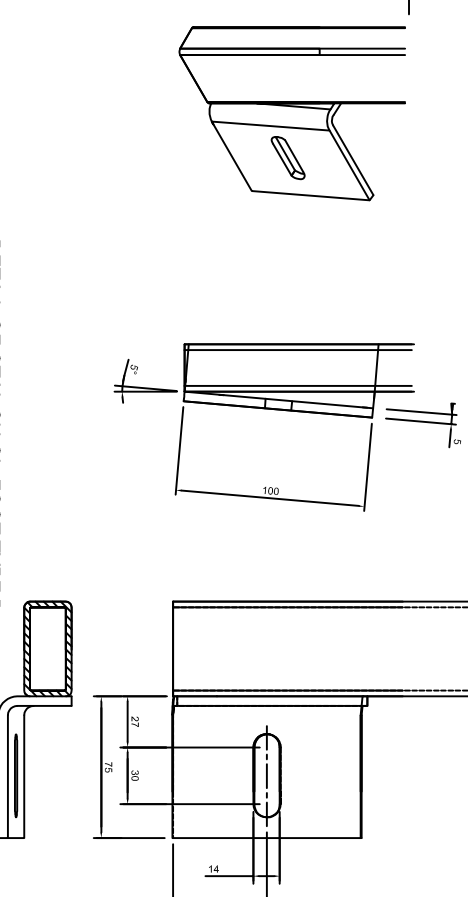

VIEW OF GUARD RAIL
SCALE 1:5

Note:
The NDX series of drawings represents non site specific installations of standard equipment and site layouts.

TITLE

This drawing was generated on computer and must not be manually updated

TYPICAL ERT 354 FABRICATED GUARD RAIL

ORIGINAL DRAWING SIZE: 297 x 420	DRN	D.B.	CHKD	C.L.	APPD/DATE
ALL DIMENSIONS ARE IN MM	DATE	---	DATE	---	SCALE
TOLERANCE +- 1 UNLESS OTHERWISE STATED	DRG. NO.	NDX1049-02ga			SHT. NO.
THIRD ANGLE PROJECTION DO NOT SCALE	ISSUE	AMENDMENTS	SCALE		
	A	INITIAL ISSUE	N.T.S.		
	B	REDRAWN	13 of 18		
	C	UPDATED SEE REV. SHT.			

