
BEFORE CAPPING, THE CABLE SHALL BE CUT SQUARE AND THE LENGTH OF CABLE TO BE CAPPED SHALL BE THOROUGHLY CLEANED USING A DRY CLEAN CLOTH OR CLEANING FLUID APPROVED BY THE CABLE MANUFACTURER FOR THE PURPOSE.

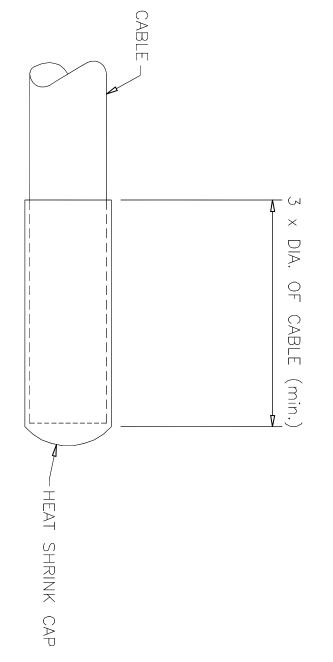

Traffic Contro EDINBURGH				
Nier Unit, I, EH6 6QQ	<u> </u>			
NADICS	SCOTTISH EXECUTIVE			
	<u> </u>			

THE METHOD OF SEALING UNUSED CABLE ENDS

This drawing was generated on computer and must not be manually updated

IHRU	TOLER	ALL D	ORIGIN			
HIRD ANGLE PROJECTION DO NOT SCALE	TOLERANCE ± 1 UNLESS OTHERWISE STATED	ALL DIMENSIONS ARE IN MM	ORIGINAL DRAWING SIZE: 297 x 420			
DO NOT SCALE	HERWISE STATED		97 × 420			
	DRG. I	DATE	DRN C.S.G.	ISSUE	ISSUE	ISSUE
	, NDX	DATE 01.12.01	C.S.G.	AN	FIRST ISSUE AMENC	MODIFIE FIRST I:
	DRG. NO. NDX1061-00dt	DATE 01.12.01	CHKD B.D.	AMENDMENTS	SSUE	MODIFIED AS PER REV SHT FIRST ISSUE AMENDMENTS
2 01 0	SHT. NO.	N.T.S.	SCALE	APPD/DATE	BD 07.12.2001 APPD/DATE	BD 07/01/02 BD 07.12.2001 APPD/DATE